


Type Designation

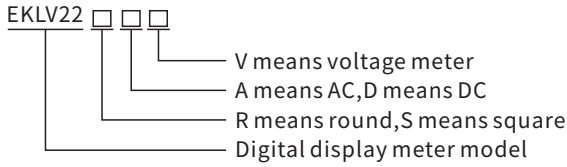

Summary

Mini digital display voltage meter

EKLV22 series products two-wire three-way AC,DC digital display voltage meter.

- Products use 2.5 inches long life LED digital tube display with compact square enclosure, convenient installation.
- Products measurement range AC 80V-500V, DC 5-120V, frequency 50/60Hz.
- Products use two wire system, AC connected in zero line and fire line directly,
- DC have polarity reverse connection protection function .



Working Condition

- Ambient temperature: -10 ~ +55°C
- Air relative humidity: 10-80%(no condensation)
- Working pressure: 80-106KPa
- Sunniness: no sunniness

Technical parameter

- Working voltage: AC 80-500V, DC 8-150V
- Working frequency: 50/60Hz
- Working current: ≤20MA
- Measuring accuracy: 1.0
- Measuring rate: <200MS/time
- Mounting-hole size: φ 22mm

| Style | Name | Type | Color | Voltage | Outine Dimensions |
|-------|------------------------|------------|---|-----------|-------------------|
| | φ 22 LED Voltage Meter | EKLV22-RAV | <ul style="list-style-type: none"> ○ White ● Green ● Red ● Yellow ● Blue | AC80-500V | |
| | φ 22 LED Voltage Meter | EKLV22-SAV | <ul style="list-style-type: none"> ○ White ● Green ● Red ● Yellow ● Blue | AC80-500V | |
| | φ 22 LED Voltage Meter | EKLV22-RDV | <ul style="list-style-type: none"> ○ White ● Green ● Red ● Yellow ● Blue | DC5-120V | |
| | φ 22 LED Voltage Meter | EKLV22-SDV | <ul style="list-style-type: none"> ○ White ● Green ● Red ● Yellow ● Blue | DC5-120V | |